


# Technical data

120g/m<sup>2</sup> - 2 sides coated

**GRIP**  
**SHEET**®

TEST	UNIT	NORM	VALUE	SPECIFICATIONS
■ Weight final product	g/m <sup>2</sup>	NF EN ISO 536, 1996	154	147 - 161
■ Thickness	µm	NF EN ISO 534, 2005	304	282 - 325
<b>BREAKING STRENGTH IN TENSION</b>				
■ Resistance	kN/m	NF EN ISO 1924.2, 1995	SM	7,83
			ST	3,8
■ Rupture length	meters		SM	5182
			ST	2517
■ Elongation	%		SM	1,9
			ST	2,9
■ Burst Index	kPa	NF EN ISO 2758, 2004	302	
■ Friction coefficient	°	NF Q 03-083,1993	SM	49
■ air porosity	cm <sup>3</sup> /m <sup>2</sup> .Pas	NF ISO 5636.3, 1992		17
■ toxicity				None
■ Skin irritation				None
■ Reuse		NF EN 13429		Yes
■ Recyclability				Yes

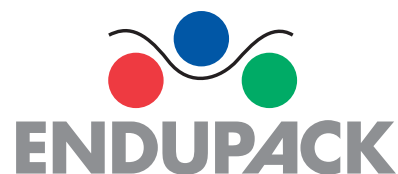

- Pallet quantity = 4,000 sheets
- % of tolerance : 2%
- Warehousing conditions: Insensitive to heat/cold