


Technical data

60g/m² - 2 sides coated

GRIP
SHEET®

TEST	UNIT	NORM	VALUE	SPECIFICATIONS
■ Weight final product	g/m ²	NF EN ISO 536, 1996	95	
■ Thickness	µm	NF EN ISO 534, 2005	210	159 - 263
BREAKING STRENGTH IN TENSION				
■ Resistance	kN/m	NF EN ISO 1924.2, 1995	SM	2,39
			ST	1,11
■ Rupture length	meters		SM	2675
			ST	1239
■ Elongation	%		SM	1,7
			ST	1,8
■ Burst Index	kPa	NF EN ISO 2758, 2004	82	
■ Friction coefficient	°	NF Q 03-083,1993	SM	49,7
■ air porosity	cm ³ /m ² .Pas	NF ISO 5636.3, 1992		12
■ toxicity				None
■ Skin irritation				None
■ Reuse		NF EN 13429		Yes
■ Recyclability				Yes

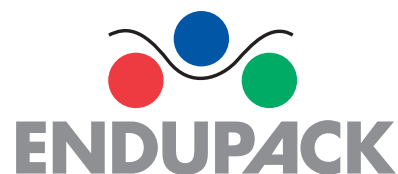

**ENDUPACK**

- Pallet quantity = 5,000 sheets
- % of tolerance : 2%
- Warehousing conditions: Insensitive to heat/cold